


OUTLET THREADED

Specification: MSS-SP-97

Pressure Rating: 3000

AVAILABLE ALLOYS:
(FERROUS) CARBON STEEL (A105) &
STAINLESS STEEL (GRADES 304 / 316 / 321 / 347)

(NON-FERROUS) CUNI (90/10 & 70/30),
NICU (MONEL), ALUMINUM AND BRONZE

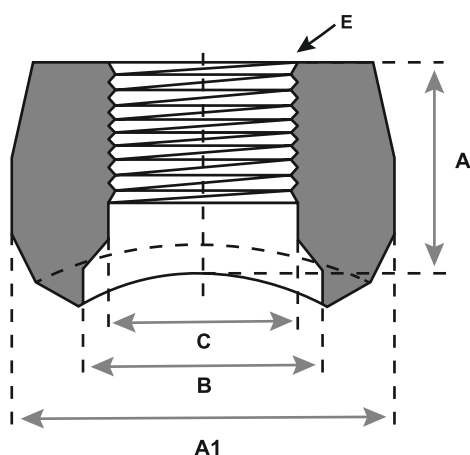

CLASS 3000											
OUTLET SIZE	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
P/N	TOLETX-040	TOLETX-060	TOLETX-100	TOLETX-150	TOLETX-200	TOLETX-250	TOLETX-300	TOLETX-400	TOLETX-450	TOLETX-500	TOLETX-600
A	0.750	0.813	1.000	1.063	1.313	1.313	1.375	1.500	1.813	2.000	2.250
A1	1.000	1.250	1.375	1.750	2.125	2.563	2.875	3.500	4.063	4.813	6.000
B	0.625	0.750	0.938	1.188	1.438	1.750	2.000	2.563	3.000	3.688	4.750
C	0.379 MIN - 0.410 MAX	0.514 MIN - 0.545 MAX	0.679 MIN - 0.710 MAX	0.889 MIN - 0.920 MAX	1.154 MIN - 1.185 MAX	1.485 MIN - 1.516 MAX	1.725 MIN - 1.756 MAX	2.178 MIN - 2.209 MAX	2.678 MIN - 2.709 MAX	3.279 MIN - 3.310 MAX	4.251 MIN - 4.282 MAX
E	1/4 X 18	3/8 X 18	1/2 X 14	3/4 X 14	1 X 11.5	1 1/4 X 11.5	1 1/2 X 11.5	2 X 11.5	2 1/2 X 8	3 X 8	4 X 8

NOTES: For P/N's replace X with the following codes:

Stainless Steel 304 - **304** Carbon Steel - **CS** Bronze - **B**
Stainless Steel 316 - **316** Cuni 90/10 - **9** Nicu (Monel) - **M**
Stainless Steel 321 - **321** Cuni 70/30 - **7** Aluminum - **A**
Stainless Steel 347 - **347**